

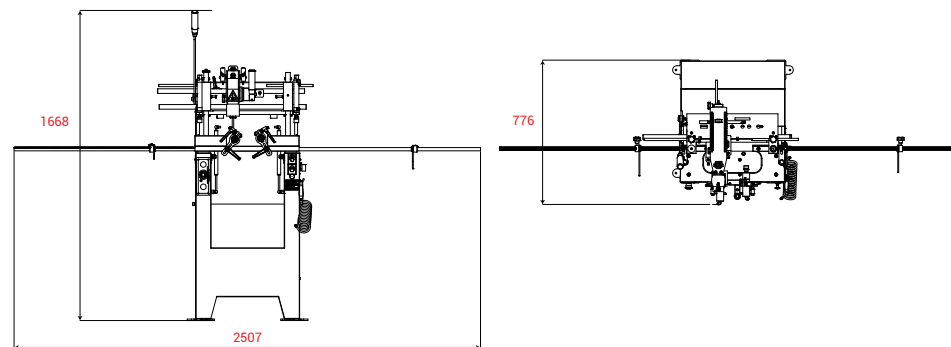
- Manual control with the guidedness of tracking tip.
- Copy routing with 1:1 ratio template.

- Practical height adjustment with rotating support stoppers.

Optional Equipments











- MR 100 Centering Device



General Features

- Opens the espagnolette canal, lock and barrel slot holes on the aluminum profiles.
- The copy routing motor is easily operated with one button.
- Thanks to the support mills, the canals are opened without template.

DF 4065

 400 V (50-60 Hz) (kW) 1,4	 6-8 bar (l/dk) 340	 kg 115	 W x L x H (mm) 2507 x 776 x 1668	 a x h (mm) 120 x 100 — x 5	 X x Y x Z (mm) 95 x 260 x 105	 L x D1 x D2 (mm) 120 x 8 x 8	 A (mm) 260
--	---	---	--	---	---	--	--