












General Features

- Swift and perfect screwing of profiles with reinforcement steel installed.
- Adjustable screwing place and strength.
- Standard measurement of bits tip used on machine is PH2 127mm. Other tips should not be used except this.
- Screwing up to 5mm sheet material in case of using recommended screws.
- Automatic screw feeding.
- Left and Right profile feeding stand.
- Warning and security labels in different languages.
- Double screwing unit.
- Working of screwing heads jointly or independently.
- Center points of screwing heads is between 250-550mm.
- Working with pedal.
- Fast transition between different profiles thanks to adjustable table.

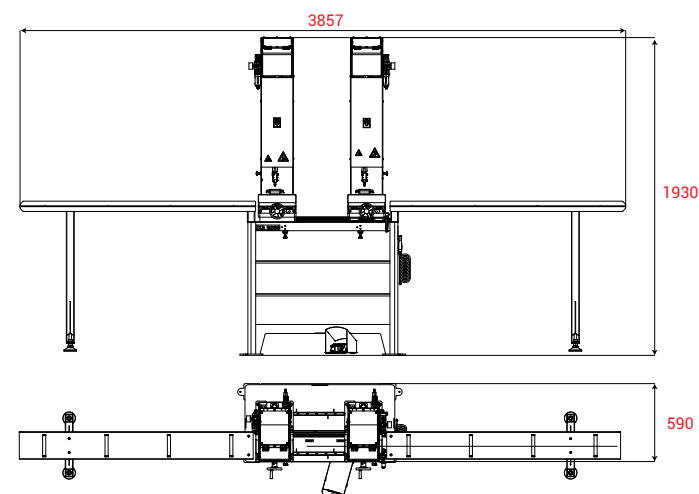

KA 2030

 400 V (50-60 Hz) (kW)	 6-8 bar (t/dk)	 kg	 W x L x H (mm)	 a x h (mm) (min.)	 a x h (mm) (max.)	 A x B (mm)	 S x K x L (mm)
-	500	200	3857x590x1930	-	120 x 150	-	S: Ø3.9 - Ø4.2 K: Ø6.5 - Ø7.5 L: 15 - 40